


Portable UV Radiometer 7.1 (for UVB)

GUVB-T11GS7.1-L (Embedded sensor)



Description : Portable UVB Intensity Measurement, Embedded sensor

Function & Display : Absolute Power (mW/cm^2), Dose (J/cm^2), Max Power (mW/cm^2)

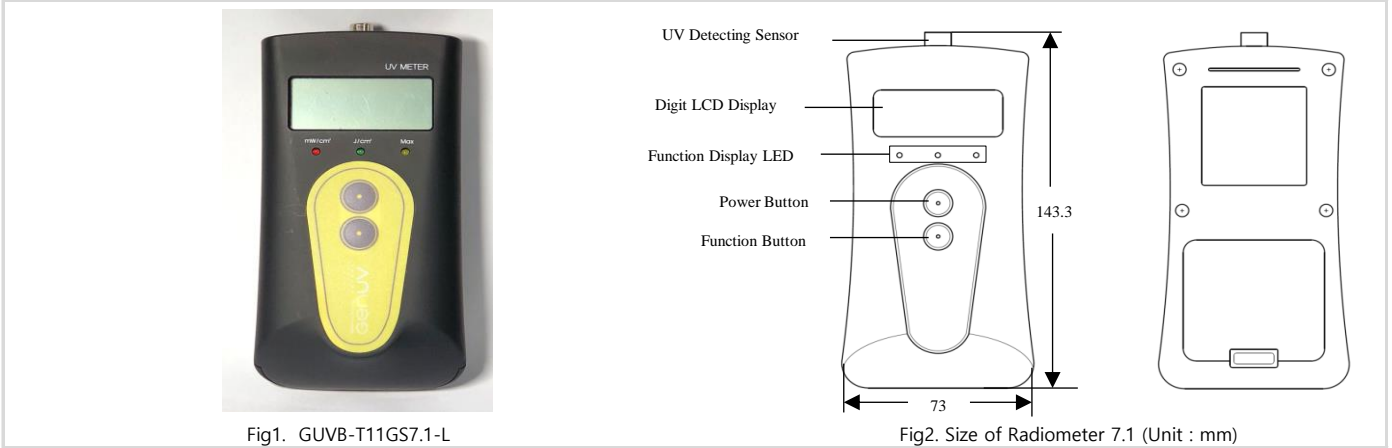

Features and Applications

Features	Applications
<ul style="list-style-type: none"> - 4.0 digit LCD display - Integrated Sensor and Display - Absolute Power, Dose and Max Power displayed 	<ul style="list-style-type: none"> - UVB Intensity Measurements - UVB Transmittance Measurements - Portable UVB Intensity Meter

UV Radiometer Dimensions

Height(mm)	Width(mm)	Thickness(mm)	Weight(g)	Material
143.3	73	31	100 (without batt.)	ABS

Absolute Maximum Ratings

Parameter	Min.	Typ.	Max.	Unit	Remark
Storage Temperature	0		60	°C	
Operating Temperature	0		50	°C	
Operating Humidity	10		85	% RH	
Battery		9		VDC	DC 9V (6LR61/6F22)


Electro-Optical Characteristics (at 25°C)

Parameter	Min.	Typ.	Max.	Unit	Remark
Detection Range	220		320	nm	10% of R_{peak}
Detection Power Range*	0		100.0	mW/cm^2	

*Customized available (Maximum of detection power : $10\text{W}/\text{cm}^2$)

(NIST Traceable)

Relative Responsivity

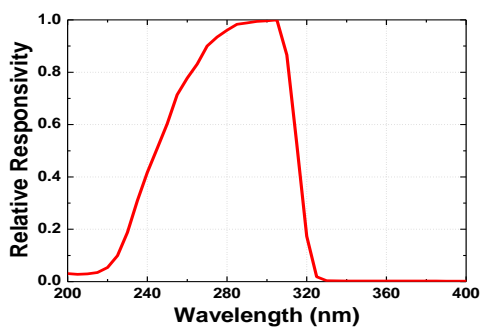

GUVB-T11S7.1-L

